
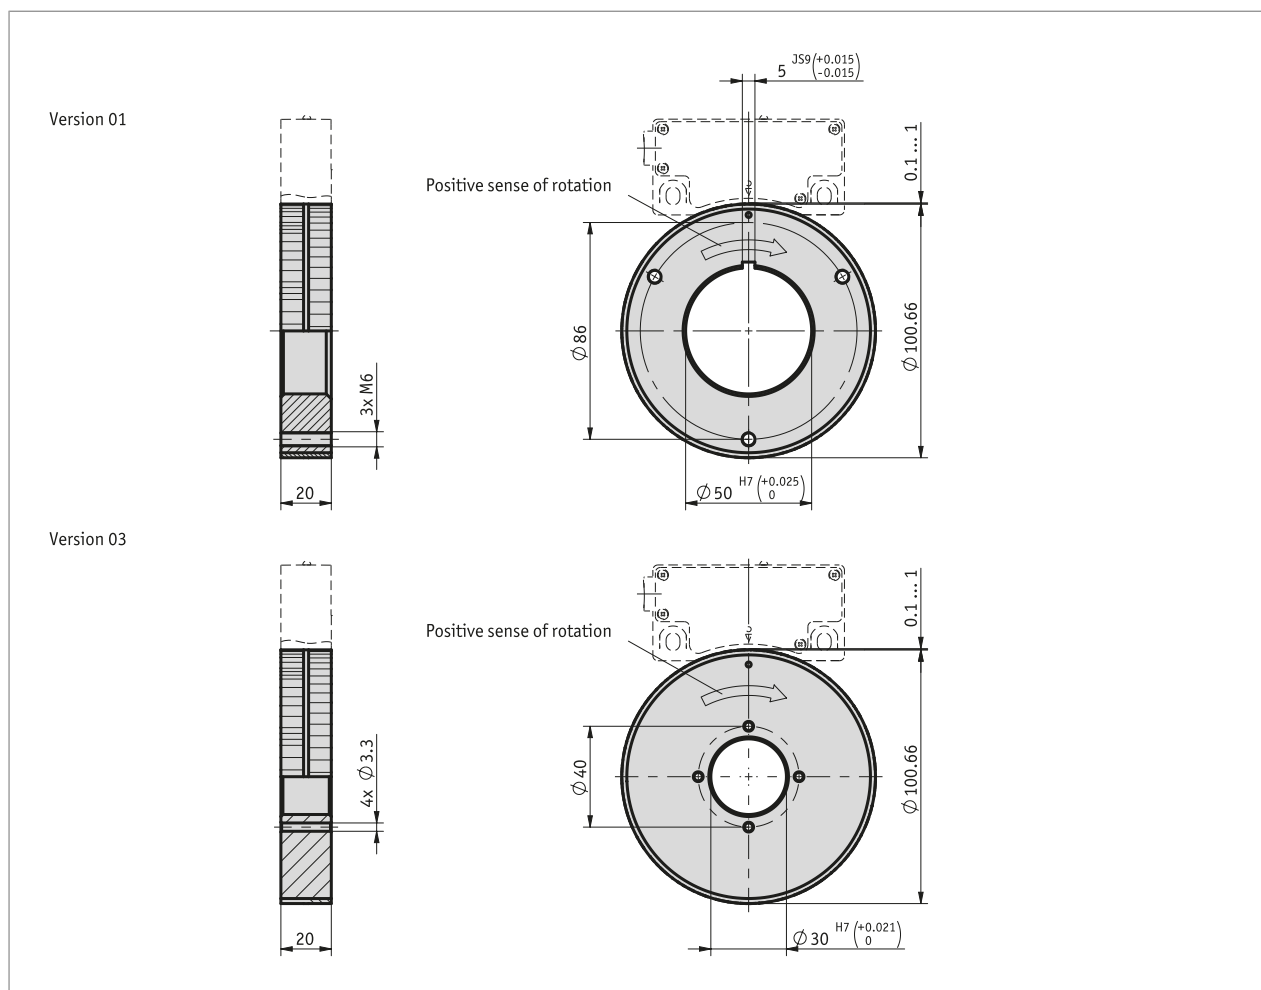


Profile

- designed for high rotational speeds
- Use with MSAC506 magnetic sensor
- Easy hollow-shaft mounting
- Different hollow shaft diameters (customized adjustments on request)



Mechanical data

Feature	Technical data	Additional information
Speed	≤6000 min ⁻¹	
Flange	aluminum	

System data

Feature	Technical data	Additional information
Pole length	360 °	
System accuracy	±1 °	with run-out error of 50 µm
Measuring range	5 mm	pole number 64

Ambient conditions

Feature	Technical data	Additional information
Ambient temperature	100 %	condensation admissible
Storage temperature	-30 ... 100 °C	
Relative humidity	-30 ... 100 °C	

Order

■ Ordering table

Feature	Ordering data	Spezifikation	Additional information
version	A 01 03	64 poles, Ø30 H7 64 poles, Ø30 H7	

■ Order key

MRA506C -

A



Scope of delivery:
MRA506C